



REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL.05'06

**MATERIAL:**  
 Insulator: Hi-temp PPS.UL 94V-0, 240 °C ,Color: Brown  
 Contact Material: Phosphor Bronze JIS 5210  
 Contact Plated: G:Gold Plated Over Nickel  
 T: Tin Over Nickel


**SPECIFICATIONS:**  
 Temperature Range: -50 °C to 105 °C  
 Current Rating: 1 AMP  
 Capacitance: 1.0 Picofarads (Max)  
 Contact Resistance: 30 Milliohms (Max)  
 Insulation Resistance: 1000 Megohm (Max)  
 Withstanding Voltage: AC 600 Vrms

Package option:TUBE or REEL  
 Contact plated:G=Gold plated over nickel  
 T=Tin plated over nickel

NO. OF CONTACT	A±0.2	B±0.2	C±0.1	D±0.1	E±0.2
20	15.66	15.66	5.08	5.08	17.28
28	18.20	18.20	7.62	7.62	20.87
32	18.20	20.74	7.62	10.16	22.60
44	23.28	23.28	12.70	12.70	28.30
52	25.82	25.82	15.24	15.24	31.65
68	30.90	30.90	20.32	20.32	38.83
84	35.98	35.98	25.40	25.40	46.00

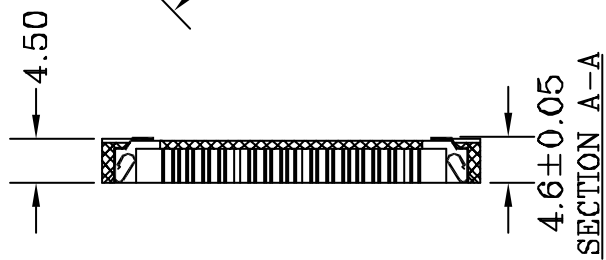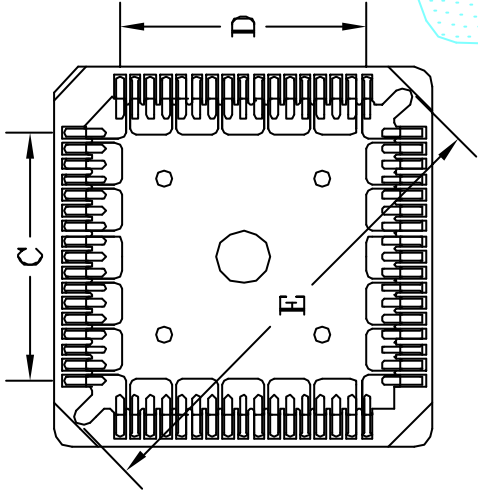

4.6±0.05  
SECTION A-A

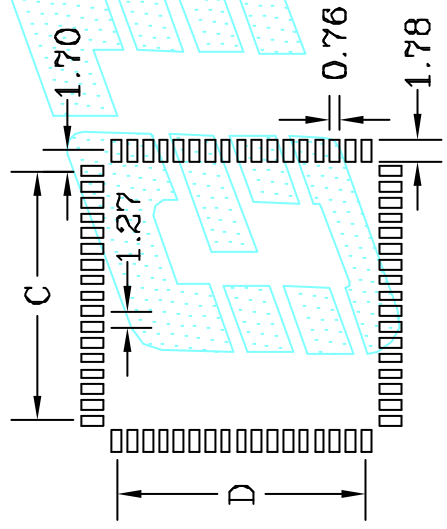

P.C.B LAYOUT

NOTE:  
 1.DIMENSIONS MARKED C\* TO BE CHECKED  
 BY GTK QC



TOLERANCE UNLESS OTHERWISE SPECIFIED		ANGLE
LINEAR	X. ±	± 2
	X. ±	±
	.XX ±	.XX ±
	.XXX ±	.XXX ±
APPD		
CHKD		
DRAW	Z	JUL.052005

PROJECTION	TITLE	PART NO.	CAD NO.	SHEET
	PLCC SOCKET	PLCC***S/BR/****	1315	1 OF 1
UNITS	SMT TYPE	F:\Drw\SOC\SOC-0344		
SCALE	CPART NO			
SIZE				
A4				

**GOLD-TEK** ELECTRIC CO., LTD.

圖面編號:GTKSD1530-A(1)