


# D-SUB H.D. SOLDER TYPE



**ULO-DB423**

**PITCH: 2.29/2.41mm**

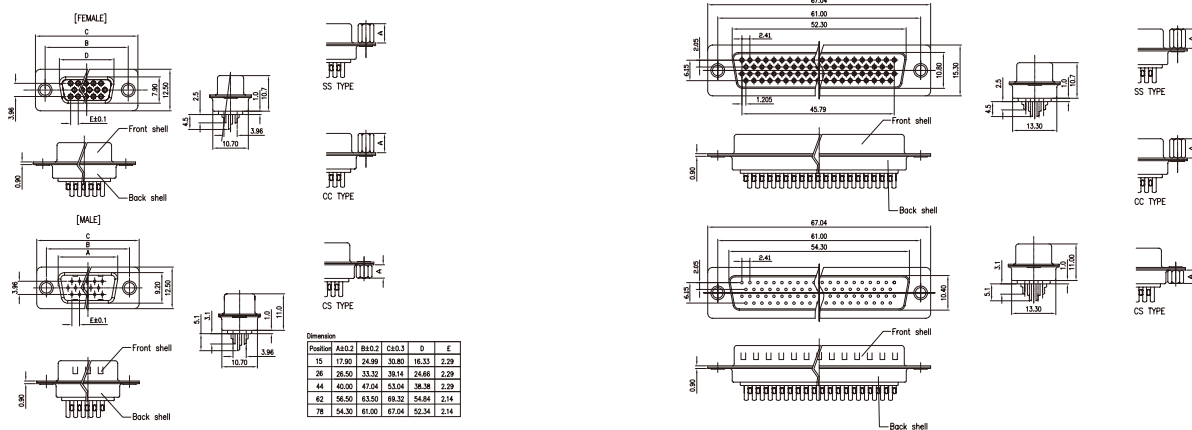

Specification	
Contact Resistance:	20mΩ Max .Initial
Dielectric Withstanding Voltage:	500V AC(rms) For 1 Minute
Insulation Resistance:	1000MΩ Min
Temperature Range:	-45°C~+105°C
Material	
Insulator:	Thermoplastic(UL 94-0)
Contact Material:	Copper Alloy
Shell:	Steel

## HOW TO ORDER

ULO-DB423 - X X X X X X X

- SCREW DIM. A
  - 1: 3.00
  - 2: 4.00
  - 3: 4.50
  - 4: 5.00
  - 5: 5.50
  - 6: 5.80
- SCREW TYPE
  - 1: Standard(W/O nut)
  - 2: CS TYPE
- CONTACT PLATING
  - 8: FULL GOLD FLASH
  - S1: SELECTIVE GOLD FLASH
- SHELL PLATING
  - T: FORNT & BACK SHELL TIN
  - N: FORNT SHELL NICKEL, BACK SHELL TIN
- HOUSING COLOR
  - B: BLACK
  - W: WHITE
  - U: BLUE
- CONNECTOR TYPE
  - M: MALE
  - F: FEMALE
- No. OF CONTACTS
  - 15: 15pos.
  - 26: 26pos.
  - 44: 44pos.
  - 62: 62pos.
  - 78: 78pos.